



ALROC - MV - Sheath FENTECRAN/40 - /60

ISO 9001

BUREAU VERITAS
Certification



F
E
N
T
E
C
R
A
N




FENTECRAN/40

FENTECRAN/60

ALROC

Z.I de la
fonderie
72160 Tuffé
France

Phone :
33.(0)2.43.71.11.80
Fax :
33.(0)2.43.71.16.51
Web : www.alroc.fr
E-mail :
commercial@alroc.fr
info@alroc.fr

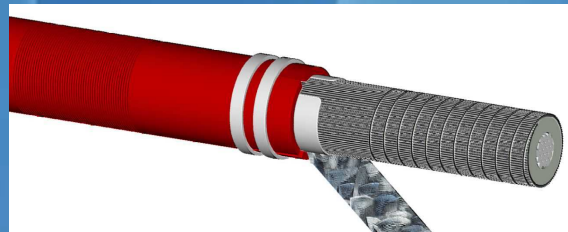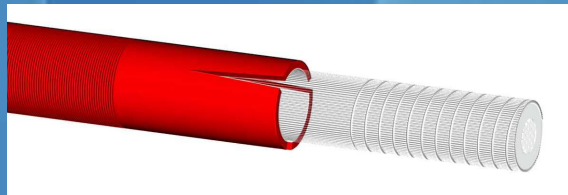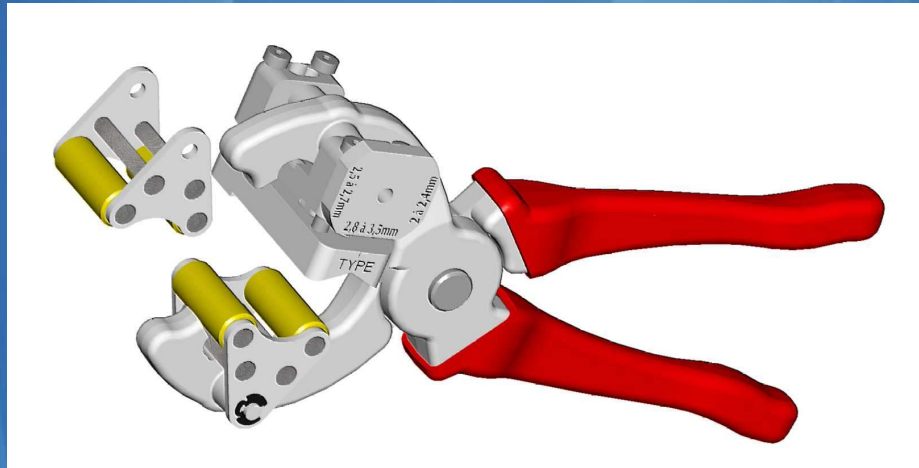

FUNCTIONS

ALROC FENTECRAN plier is an evolution of the ALROCRAN plier. It allows to perform 1, 2, 3, or 4 splits on the outer sheaths and also tighten the sheath onto the pick-plate

CHARACTERISTICS

- ☛ Screen-plug setting
- ☛ Realization of 1, 2, 3 or 4 splits
- ☛ Compatibility with cables C 33-226, UTE C 33-223, HN 33S23 et NFC 33223
- ☛ Sheath thickness 2 to 3.5 mm

Model	FENTECRAN 40	FENTECRAN 60
Sheath Ø	25,6 to 40 mm	25,6 to 58 mm
Sections	50 ² to 240 ²	50 ² to 630 ²
Length	280 mm	280 mm
Width	80 mm	90 mm
Height	110 mm	110 mm
Weight	1,070 Kg	1,100 Kg