

Section

MV Insulation

ApplicationField
Laboratory**PRODUCT BENEFITS**

Set the length of insulation to be removed thanks to the thrust (BR)

TOOL CAPACITY

Diameter 14 - 40 mm
0,551 - 1,575 inch

Insulation thickness capacity 9 mm / 0,354 in

TOOL DIMENSIONS

Length	270 mm
Width	100 mm
Height	165 mm
Weight without box	1,1 Kg
Packaging	None

ALROC SAS

Z.I. de la Fonderie - 72160 TUFFE
FRANCE

Phone: +33 2 43 71 11 80

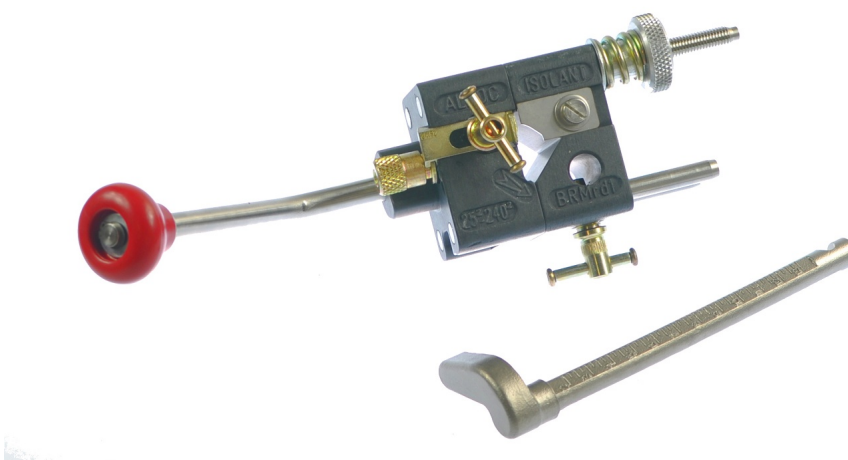
Fax number : +33 2 43 71 16 51

www.alroc.fr

Tool to remove primary insulation

TO DO WHAT

The BRMRD1E enables the user to set the length and remove the insulation with a straight and neat cut on MV cables

**Options**

SGM - Large size pouch

Spare part

LMF2 - Spare blade for primary insulation

BR - Thrust to set the length of insulation to be remove

VBB1 - Screw for locking the thrust

PCR - Quick set up right angled 45° handle

VBL1 - Screw for locking the blade LMF2

Associated tool

LHA - Tool to chamfer insulation

MF2/40 - Multifunction tool for outer sheath and insulation

ASC25 R1 - Tools to remove the bonded semiconductor with chamfer

MV cables Tools

BRMRD1E



Part Number	Diameter	Tool capacity	Dimensions			Packaging
		Insulation thickness capacity	Length	Width	Height	
BRMRD1E	14 - 40 mm 0,551 - 1,575 in	9 mm / 0,354 in	270 mm 10,630 in	100 mm 3,937 in	165 mm 6,496 in	none